



TOP SELECTION GARDEN 2018 - CLASSIC RANGE








BISSO/ANNA
for details see pag. 5

E22.131


FILAMENT LED LAMP

- Perfect **matching with classic lanterns**: clear **LED filament lamp** with the look and the feeling of an incandescent bulb.
- **Suitable for outdoor use**: 100-240V built-in driver fully protected against heat and humidity by silicone paste.
- **Omnidirectional light**: 360° light output for a better lighting distribution.
- **High efficiency**: 90% energy saving.


6w	8w	12w		2700 Kelvin	4000 Kelvin
800lm	1000lm	1500lm		SAPPHIRE LED SUPPORT EPISTAR CHIP	
100-240V	100-240V	100-240V		90% HYDROGEN GAS	
		SILICONE PROTECTION DRIVER			



ENERGY CLASS: A⁺




LVD tested
EMC tested
CE
ERP 6000 h




INDOOR & OUTDOOR USE
+80°C -30°C
90% HUMIDITY
VOLTAGE SURGE RESISTANT







ANNA pg.04



SABA pg.08




GLOBE 250 pg.12




IESSE pg.52


GARDEN SMALL




RUT pg.16



SALEM pg.20




GOLIA pg.24



CEFA pg.28



GLOBE 300 pg.32




DARIA pg.52


GARDEN MEDIUM




NOEMI pg.36



SIOLE pg.40



TOBIA pg.44



SIMON pg.48

NEW VERSION
HIGH POWER LED

GARDEN LARGE




SAURO 1100 pg.55



SAURO 800 pg.55



SAURO 500 pg.56



MIRELLA pg.56

BOLLARDS

ANNA RANGE

SMALL SIZE



MADE IN
ITALY

E22.110.F1R



E27 FILAMENT LED

**INDOOR &
OUTDOOR
USE**

+80°C
-30°

90%
HUMIDITY

VOLTAGE SURGE
RESISTANT



**6W (800 lm)
8W (1000 lm)
12W (1500 lm)**

More details at page 60



AVAILABLE COLORS	
RESIN BODY	DIFFUSER
	
BLACK (A)	WHITE (W)
	
CLEAR (X)	OPAL (Y)






E27 LED FILAMENT VERSION	
	6W 800 lm 100-240V 50/60 Hz 4000K 2700K INCANDESCENT




E27 VERSION




BISSO/ANNA					
	<table border="1"> <tr> <td>6W 4000K 2700K</td> <td>E22.131.F1L E22.131.F1R</td> </tr> <tr> <td>E27</td> <td>E22.131.E27</td> </tr> </table>	6W 4000K 2700K	E22.131.F1L E22.131.F1R	E27	E22.131.E27
	6W 4000K 2700K	E22.131.F1L E22.131.F1R			
E27	E22.131.E27				
	 <p>Master box: 18pcs</p>				



MIKROLOT/ANNA					
	<table border="1"> <tr> <td>6W 4000K 2700K</td> <td>E22.110.F1L E22.110.F1R</td> </tr> <tr> <td>E27</td> <td>E22.110.E27</td> </tr> </table>	6W 4000K 2700K	E22.110.F1L E22.110.F1R	E27	E22.110.E27
	6W 4000K 2700K	E22.110.F1L E22.110.F1R			
E27	E22.110.E27				
	 <p>Master box: 18pcs</p>				

SICHEM/ANNA					
	<table border="1"> <tr> <td>6W 4000K 2700K</td> <td>E22.120.F1L E22.120.F1R</td> </tr> <tr> <td>E27</td> <td>E22.120.E27</td> </tr> </table>	6W 4000K 2700K	E22.120.F1L E22.120.F1R	E27	E22.120.E27
	6W 4000K 2700K	E22.120.F1L E22.120.F1R			
E27	E22.120.E27				
	 <p>Master box: 18pcs</p>				





AVAILABLE COLORS			
RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



E27 LED FILAMENT VERSION	
	6W 800 lm 100-240V 50/60 Hz 4000K 2700K =  60W INCANDESCENT


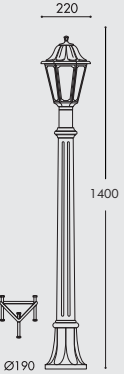
MIZAR/ANNA (resin)

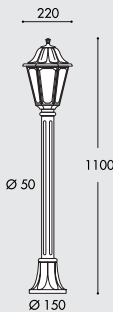

IP55 	6W 4000K E22.151.F1L 2700K E22.151.F1R	
---	--	---



ALOE'.R/ANNA (resin)



IP55 	6W 4000K E22.163.F1L 2700K E22.163.F1R	
---	--	---

ARTU'/ANNA



IP55 	6W 4000K E22.158.F1L 2700K E22.158.F1R	
--	--	--

"METAL POST COVERED BY RESIN"

STEEL
RESIN
EXPANSE

ANTI RUST
LIFETIME GUARANTEE
NO PAINTING REQUIRED

MADE IN ITALY

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE


DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZERS




GIGI BISSO/ANNA 2L

6W 4000K E22.156.S20.F1L
2700K E22.156.S20.F1R

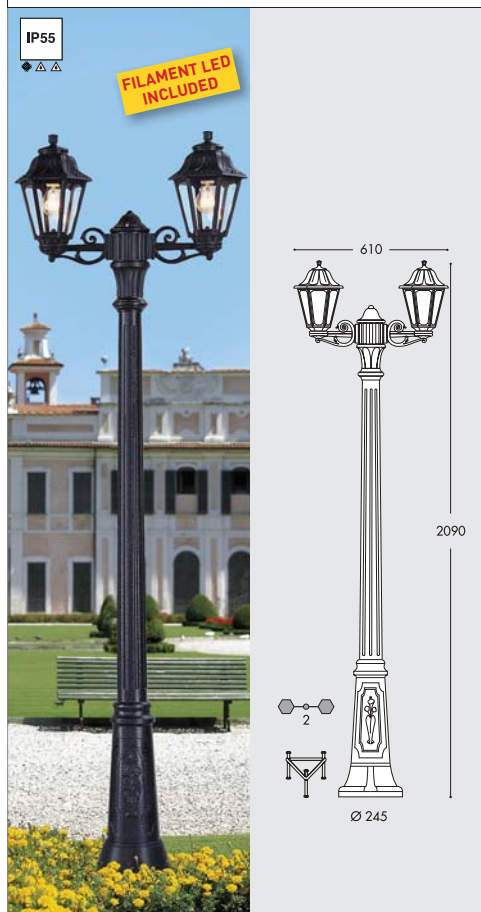

GIGI BISSO/ANNA 3L

6W 4000K E22.156.S30.F1L
2700K E22.156.S30.F1R

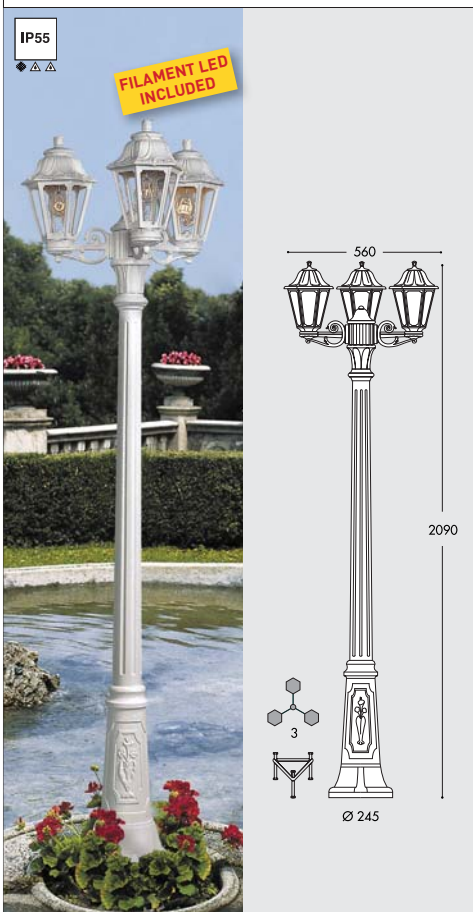

SABA RANGE

SMALL SIZE

fumagalli®
since 1973

MADE IN
ITALY



K22.131.F1R

E27 FILAMENT LED

**INDOOR &
OUTDOOR
USE**

+80°C
-30°

90%
HUMIDITY

VOLTAGE SURGE
RESISTANT

6W (800 lm)
8W (1000 lm)
12W (1500 lm)

More details at page 60



AVAILABLE COLORS			
RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



E27 LED FILAMENT VERSION	
	6W 800 lm 100-240V 50/60 Hz 4000K 2700K INCANDESCENT



E27 VERSION






BISSO/SABA							
 <p>IP55 ♦ ▲ ▲</p>	<table border="1"> <tr> <td>6W</td> <td>4000K 2700K</td> <td>K22.131.F1L K22.131.F1R</td> </tr> <tr> <td>E27</td> <td></td> <td>K22.131.E27</td> </tr> </table>	6W	4000K 2700K	K22.131.F1L K22.131.F1R	E27		K22.131.E27
	6W	4000K 2700K	K22.131.F1L K22.131.F1R				
E27		K22.131.E27					
 <p>275 460 275 460</p> <p>Master box: 18pcs</p>							

MEDIUM LANTERN



MIKROLOT/SABA							
 <p>IP55 ▲ ▲</p>	<table border="1"> <tr> <td>6W</td> <td>4000K 2700K</td> <td>K22.110.F1L K22.110.F1R</td> </tr> <tr> <td>E27</td> <td></td> <td>K22.110.E27</td> </tr> </table>	6W	4000K 2700K	K22.110.F1L K22.110.F1R	E27		K22.110.E27
	6W	4000K 2700K	K22.110.F1L K22.110.F1R				
E27		K22.110.E27					
 <p>400 Ø 130</p> <p>Master box: 18pcs</p>							

SICHEM/SABA							
 <p>IP55 ♦ ▲ ▲</p>	<table border="1"> <tr> <td>6W</td> <td>4000K 2700K</td> <td>K22.120.F1L K22.120.F1R</td> </tr> <tr> <td>E27</td> <td></td> <td>K22.120.E27</td> </tr> </table>	6W	4000K 2700K	K22.120.F1L K22.120.F1R	E27		K22.120.E27
	6W	4000K 2700K	K22.120.F1L K22.120.F1R				
E27		K22.120.E27					
 <p>220 810</p> <p>Master box: 18pcs</p>							

LARGE LANTERN



HALF LANTERN



BOLLARD



AVAILABLE COLORS

RESIN BODY	DIFFUSER
 BLACK (A)	 WHITE (W)
 CLEAR (X)	 OPAL (Y)

ENERGY CLASS

energy - everyside

A+ A A- B C D E

A+

E27 LED FILAMENT VERSION



6W
800 lm
100-240V
50/60 Hz
4000K 2700K
60W INCANDESCENT

MIZAR/SABA (resin)

IP55

FILAMENT LED INCLUDED



6W 4000K 2700K K22.151.F1L K22.151.F1R



220
1110
Ø 50
Ø 150

ALOE'.R/SABA (resin)

IP55

FILAMENT LED INCLUDED



6W 4000K 2700K K22.163.F1L K22.163.F1R



220
1400
Ø 190

ARTU'/SABA

IP55

FILAMENT LED INCLUDED



6W 4000K 2700K K22.158.F1L K22.158.F1R



220
1820
Ø 245

"METAL POST COVERED BY RESIN"

STEEL
RESIN
EXPANSE

ANTI RUST
LIFETIME GUARANTEE
NO PAINTING REQUIRED

MADE IN ITALY

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE


DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZERS




GIGI BISSO/SABA 2L

6W 4000K K22.156.S20.F1L
2700K K22.156.S20.F1R

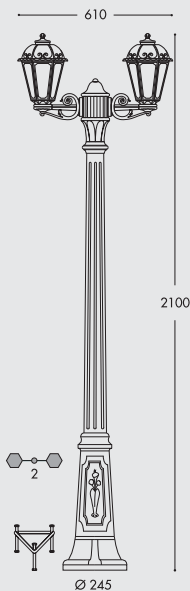

GIGI BISSO/SABA 3L

6W 4000K K22.156.S30.F1L
2700K K22.156.S30.F1R

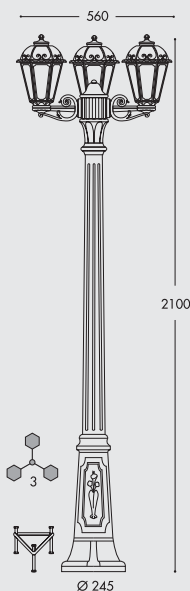

MEDIUM LANTERN



LARGE LANTERN



HALF LANTERN



BOLLARD



GLOBE 250 RANGE

SMALL SIZE

fumagalli
since 1973

MADE IN
ITALY



E27 FILAMENT LED

**INDOOR &
OUTDOOR
USE**

+80°C
-30°

90%
HUMIDITY

VOLTAGE SURGE
RESISTANT



6W (800 lm)

8W (1000 lm)

12W (1500 lm)

More details at page 60



G25.131.F1R



DOUBLE
INSULATION
CLASS


AVAILABLE COLORS				
RESIN BODY		DIFFUSER		
				
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)




E27 LED FILAMENT VERSION	
	6W 800 lm 100-240V 50/60 Hz 4000K 2700K  60W INCANDESCENT

E27 VERSION






6W	4000K	G25.131.F1L
2700K		G25.131.F1R


E27	G25.131.E27
------------	-------------




Master box: **36pcs**

MEDIUM LANTERN








6W	4000K	G25.110.F1L
2700K		G25.110.F1R

E27	G25.110.E27
------------	-------------



Master box: **36pcs**





6W	4000K	G25.120.F1L
2700K		G25.120.F1R

E27	G25.120.E27
------------	-------------



Master box: **36pcs**

LARGE LANTERN



HALF LANTERN



BOLLARD




GLOBE 250 RANGE SMALL SIZE



AVAILABLE COLORS

RESIN BODY		DIFFUSER		
				
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)

ENERGY CLASS
энергия - evergreen




A+

E27 LED FILAMENT VERSION



6W	
800 lm	
100-240V	
50/60 Hz	
4000K	2700K
 60W INCANDESCENT	


MIZAR/G250 (resin)



IP55

FILAMENT LED INCLUDED

6W	4000K	G25.151.F1L
2700K		G25.151.F1R



box: **2pcs**

ALOE'.R/G250 (resin)



IP55

FILAMENT LED INCLUDED

6W	4000K	G25.163.F1L
2700K		G25.163.F1R



box: **2pcs**

ARTU'/G250



IP55

FILAMENT LED INCLUDED

6W	4000K	G25.158.F1L
2700K		G25.158.F1R



box: **2pcs**

"METAL POST COVERED BY RESIN"

STEEL
RESIN
EXPANSE

ANTI RUST
LIFETIME GUARANTEE
NO PAINTING REQUIRED

MADE IN ITALY

ANTI CORROSION UV-RAYS STABILIZED NO MAINTENANCE DOUBLE INSULATION NOT AFFECTED BY CHEMICAL FERTILIZERS



GIGI BISSO/G250 2L

6W	4000K	G25.156.S20.F1L
	2700K	G25.156.S20.F1R

IP55

◆ ▲ ▲

FILAMENT LED INCLUDED

box: **2pcs**

GIGI BISSO/G250 3L

6W	4000K	G25.156.S30.F1L
	2700K	G25.156.S30.F1R

IP55

◆ ▲ ▲

FILAMENT LED INCLUDED

box: **2pcs**



RUT RANGE

MEDIUM SIZE

fumagalli
since 1973

MADE IN
ITALY

E26.157.S30.M1R

E27 FILAMENT LED

**INDOOR &
OUTDOOR
USE**

+80°C
-30°

90%
HUMIDITY

VOLTAGE SURGE
RESISTANT

6W (800 lm)

8W (1000 lm)

12W (1500 lm)

More details at page 60




AVAILABLE COLORS			
RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



E27 LED FILAMENT VERSION	
	8W 1000 lm 100-240V 50/60 Hz 4000K 2700K  75W INCANDESCENT


E27 VERSION



IP55
♦ ▲ ▲

8W 4000K 2700K	E26.131.M1L E26.131.M1R
E27	E26.131.E27

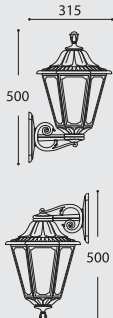

315
500

Master box: **12pcs**

MEDIUM LANTERN






IP55
♦ ▲ ▲

8W 4000K 2700K	E26.111.M1L E26.111.M1R
E27	E26.111.E27




260
530
Ø 150

Master box: **12pcs**



IP55
♦ ▲ ▲

8W 4000K 2700K	E26.120.M1L E26.120.M1R
E27	E26.120.E27

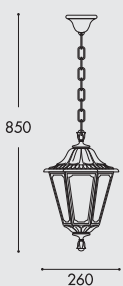

850
260

Master box: **12pcs**

LARGE LANTERN



HALF LANTERN




AVAILABLE COLORS			
RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



E27 LED FILAMENT VERSION			
		6W	8W
		800Lm	1000Lm
		100-240V	100-240V
		50/60 Hz	50/60 Hz
		4000K	2700K
		2700K	4000K
		60W INCANDESCENT	75W INCANDESCENT


MIZAR/RUT (resin)




IP55

FILAMENT LED INCLUDED

6W	4000K	E26.151.F1L
2700K		E26.151.F1R
8W	4000K	E26.151.M1L
2700K		E26.151.M1R

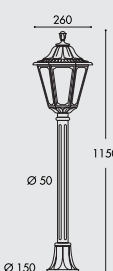


RICU BISSO/RUT 2L



IP55

FILAMENT LED INCLUDED

6W	4000K	E26.157.S20.F1L
2700K		E26.157.S20.F1R
8W	4000K	E26.157.S20.M1L
2700K		E26.157.S20.M1R

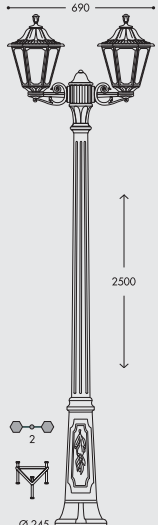

RICU BISSO/RUT 3L



IP55

FILAMENT LED INCLUDED

6W	4000K	E26.157.S30.F1L
2700K		E26.157.S30.F1R
8W	4000K	E26.157.S30.M1L
2700K		E26.157.S30.M1R





ALOE'.R/RUT (resin)

IP55
◆ ▲ ▲

6W	4000K	E26.163.F1L
	2700K	E26.163.F1R
8W	4000K	E26.163.M1L
	2700K	E26.163.M1R

FILAMENT LED INCLUDED

ARTU'.R/RUT

IP55
◆ ▲ ▲

6W	4000K	E26.158.F1L
	2700K	E26.158.F1R
8W	4000K	E26.158.M1L
	2700K	E26.158.M1R

FILAMENT LED INCLUDED



GIGI.R/RUT

IP55
◆ ▲ ▲

6W	4000K	E26.156.F1L
	2700K	E26.156.F1R
8W	4000K	E26.156.M1L
	2700K	E26.156.M1R

FILAMENT LED INCLUDED

RICU.R/RUT

IP55
◆ ▲ ▲

6W	4000K	E26.157.F1L
	2700K	E26.157.F1R
8W	4000K	E26.157.M1L
	2700K	E26.157.M1R

FILAMENT LED INCLUDED



SALEM RANGE
MEDIUM SIZE



K26.111.M1R



E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

6W (800 lm)
8W (1000 lm)
12W (1500 lm)

More details at page 60



AVAILABLE COLORS	
RESIN BODY	DIFFUSER
	
BLACK (A)	WHITE (W)
	
CLEAR (X)	OPAL (Y)



E27 LED FILAMENT VERSION	
	8W 1000 lm 100-240V 50/60 Hz 4000K 2700K INCANDESCENT



E27 VERSION






BISSO/SALEM					
 <p>IP55 ◆ ▲ ▲</p>	<table border="1"> <tr> <td>8W 4000K 2700K</td> <td>K26.131.M1L K26.131.M1R</td> </tr> <tr> <td>E27</td> <td>K26.131.E27</td> </tr> </table>	8W 4000K 2700K	K26.131.M1L K26.131.M1R	E27	K26.131.E27
	8W 4000K 2700K	K26.131.M1L K26.131.M1R			
E27	K26.131.E27				
					

Master box: **12pcs**



MINILOT/SALEM					
<table border="1"> <tr> <td>8W 4000K 2700K</td> <td>K26.111.M1L K26.111.M1R</td> </tr> <tr> <td>E27</td> <td>K26.111.E27</td> </tr> </table>	8W 4000K 2700K	K26.111.M1L K26.111.M1R	E27	K26.111.E27	
8W 4000K 2700K	K26.111.M1L K26.111.M1R				
E27	K26.111.E27				
	<p>Master box: 12pcs</p>				

SICHEM/SALEM					
<table border="1"> <tr> <td>8W 4000K 2700K</td> <td>K26.120.M1L K26.120.M1R</td> </tr> <tr> <td>E27</td> <td>K26.120.E27</td> </tr> </table>	8W 4000K 2700K	K26.120.M1L K26.120.M1R	E27	K26.120.E27	
8W 4000K 2700K	K26.120.M1L K26.120.M1R				
E27	K26.120.E27				
	<p>Master box: 12pcs</p>				



AVAILABLE COLORS

RESIN BODY	DIFFUSER
 BLACK (A)	 WHITE (W)
 CLEAR (X)	 OPAL (Y)

ENERGY CLASS

super premium - evergreen

A+ A A- B C D E

A+

E27 LED FILAMENT VERSION


6W	8W
800Lm	1000Lm
100-240V	100-240V
50/60 Hz	50/60 Hz
4000K 2700K	4000K 2700K
60W INCANDESCENT	75W INCANDESCENT

MIZAR/SALEM (resin)

IP55

FILAMENT LED INCLUDED

6W	4000K K26.151.F1L
2700K	K26.151.F1R
8W	4000K K26.151.M1L
2700K	K26.151.M1R

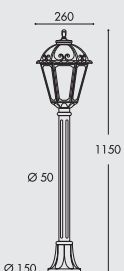

Technical drawing dimensions: 260, 1150, Ø 50, Ø 150

RICU BISSO/SALEM 2L

IP55

FILAMENT LED INCLUDED

6W	4000K K26.157.S20.F1L
2700K	K26.157.S20.F1R
8W	4000K K26.157.S20.M1L
2700K	K26.157.S20.M1R



Technical drawing dimensions: 690, 2500, Ø 245

RICU BISSO/SALEM 3L

IP55

FILAMENT LED INCLUDED

6W	4000K K26.157.S30.F1L
2700K	K26.157.S30.F1R
8W	4000K K26.157.S30.M1L
2700K	K26.157.S30.M1R



Technical drawing dimensions: 640, 2500, Ø 245

"METAL POST COVERED BY RESIN"



STEEL
RESIN
EXPANSE



ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZERS



MEDIUM LANTERN



LARGE LANTERN



HALF LANTERN



BOLLARD




ALOE'.R/SALEM (resin)



IP55

6W	4000K	K26.163.F1L
	2700K	K26.163.F1R
8W	4000K	K26.163.M1L
	2700K	K26.163.M1R



ARTU'.R/SALEM



IP55

6W	4000K	K26.158.F1L
	2700K	K26.158.F1R
8W	4000K	K26.158.M1L
	2700K	K26.158.M1R




GIGI/SALEM



IP55

6W	4000K	K26.156.F1L
	2700K	K26.156.F1R
8W	4000K	K26.156.M1L
	2700K	K26.156.M1R

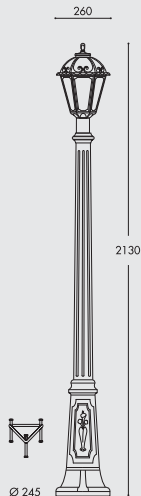


RICU/SALEM



IP55

6W	4000K	K26.157.F1L
	2700K	K26.157.F1R
8W	4000K	K26.157.M1L
	2700K	K26.157.M1R



GOLIA RANGE

MEDIUM SIZE



Q23.131.M1R

E27 FILAMENT LED

**INDOOR &
OUTDOOR
USE**

**+80°C
-30°**

**90%
HUMIDITY**


**VOLTAGE SURGE
RESISTANT**

**6W (800 lm)
8W (1000 lm)
12W (1500 lm)**

More details at page 60




AVAILABLE COLORS	
RESIN BODY	DIFFUSER
	
BLACK (A)	WHITE (W)
	
CLEAR (X)	OPAL (Y)




E27 LED FILAMENT VERSION	
	8W 1000 lm 100-240V 50/60 Hz 4000K 2700K INCANDESCENT

E27 VERSION




BISSO/GOLIA	
	8W 4000K Q23.131.M1L 2700K Q23.131.M1R
	E27 Q23.131.E27



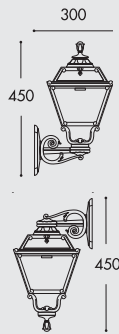



Master box: **12pcs**

MEDIUM LANTERN



MINILOT/GOLIA	
	8W 4000K Q23.111.M1L 2700K Q23.111.M1R
	E27 Q23.111.E27





Master box: **12pcs**

SICHEM/GOLIA	
	8W 4000K Q23.120.M1L 2700K Q23.120.M1R
	E27 Q23.120.E27





Master box: **12pcs**


LARGE LANTERN




BOLLARD




AVAILABLE COLORS			
RESIN BODY		DIFFUSER	
			
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)




E27 LED FILAMENT VERSION			
		6W	8W
		800Lm	1000Lm
		100-240V 50/60 Hz	100-240V 50/60 Hz
		4000K 2700K	4000K 2700K
		60W INCANDESCENT	75W INCANDESCENT

MIZAR/GOLIA (resin)

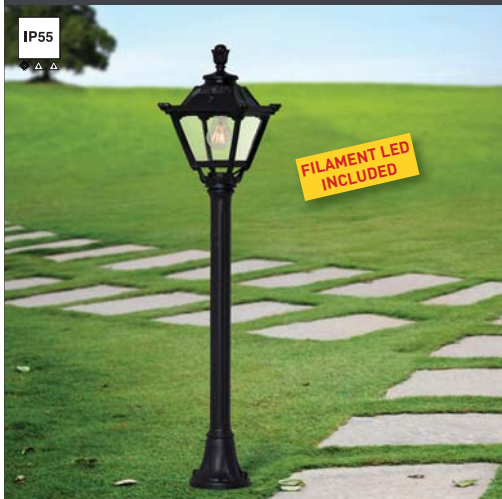


6W	4000K	Q23.151.F1L
	2700K	Q23.151.F1R
8W	4000K	Q23.151.M1L
	2700K	Q23.151.M1R

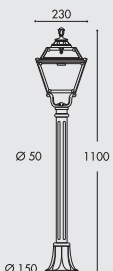

RICU BISSO/GOLIA 2L




6W	4000K	Q23.157.S20.F1L
	2700K	Q23.157.S20.F1R
8W	4000K	Q23.157.S20.M1L
	2700K	Q23.157.S20.M1R

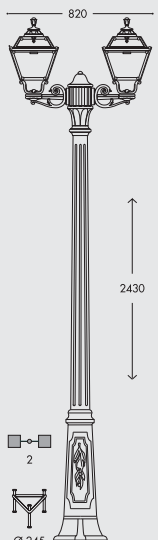

RICU BISSO/GOLIA 3L



6W	4000K	Q23.157.S30.F1L
	2700K	Q23.157.S30.F1R
8W	4000K	Q23.157.S30.M1L
	2700K	Q23.157.S30.M1R

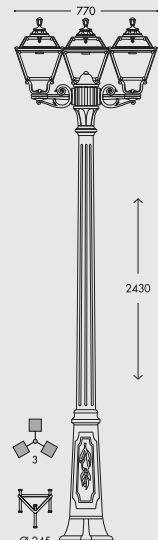

"METAL POST COVERED BY RESIN"



STEEL
RESIN
EXPANSE



ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZERS



ALOE'.R/GOLIA (resin)

IP55

6W	4000K Q23.163.F1L 2700K Q23.163.F1R
8W	4000K Q23.163.M1L 2700K Q23.163.M1R

ARTU'/GOLIA

IP55

6W	4000K Q23.158.F1L 2700K Q23.158.F1R
8W	4000K Q23.158.M1L 2700K Q23.158.M1R

GIGI/GOLIA

IP55

6W	4000K Q23.156.F1L 2700K Q23.156.F1R
8W	4000K Q23.156.M1L 2700K Q23.156.M1R

RICU/GOLIA

IP55

6W	4000K Q23.157.F1L 2700K Q23.157.F1R
8W	4000K Q23.157.M1L 2700K Q23.157.M1R



CEFA RANGE

MEDIUM SIZE



U23.120.M1R

E27 FILAMENT LED

**INDOOR &
OUTDOOR
USE**

**+80°C
-30°**

**90%
HUMIDITY**

**VOLTAGE SURGE
RESISTANT**



6W (800 lm)


8W (1000 lm)

12W (1500 lm)

More details at page 60



AVAILABLE COLORS	
RESIN BODY	DIFFUSER
	
BLACK (A)	WHITE (W)
	
CLEAR (X)	OPAL (Y)



E27 LED FILAMENT VERSION	
	8W 1000 lm 100-240V 50/60 Hz 4000K 2700K INCANDESCENT

E27 VERSION




BISSO/CEFA					
 <p>IP55</p>	<table border="1"> <tr> <td>8W 4000K 2700K</td> <td>U23.131.M1L U23.131.M1R</td> </tr> <tr> <td>E27</td> <td>U23.131.E27</td> </tr> </table>	8W 4000K 2700K	U23.131.M1L U23.131.M1R	E27	U23.131.E27
	8W 4000K 2700K	U23.131.M1L U23.131.M1R			
E27	U23.131.E27				
 <p>Master box: 12pcs</p>					



MINILOT/CEFA					
<table border="1"> <tr> <td>8W 4000K 2700K</td> <td>U23.111.M1L U23.111.M1R</td> </tr> <tr> <td>E27</td> <td>U23.111.E27</td> </tr> </table>	8W 4000K 2700K	U23.111.M1L U23.111.M1R	E27	U23.111.E27	 <p>IP55</p>
8W 4000K 2700K	U23.111.M1L U23.111.M1R				
E27	U23.111.E27				
 <p>Master box: 12pcs</p>					

SICHEM/CEFA					
<table border="1"> <tr> <td>8W 4000K 2700K</td> <td>U23.120.M1L U23.120.M1R</td> </tr> <tr> <td>E27</td> <td>U23.120.E27</td> </tr> </table>	8W 4000K 2700K	U23.120.M1L U23.120.M1R	E27	U23.120.E27	 <p>IP55</p>
8W 4000K 2700K	U23.120.M1L U23.120.M1R				
E27	U23.120.E27				
 <p>Master box: 12pcs</p>					



AVAILABLE COLORS

RESIN BODY


BLACK (A)


WHITE (W)

DIFFUSER


CLEAR (X)


OPAL (Y)

ENERGY CLASS

A+

A

B

C

D

E


A+

E27 LED FILAMENT VERSION



6W	8W
800Lm	1000Lm
100-240V	100-240V
50/60 Hz	50/60 Hz
4000K 2700K	4000K 2700K
 60W INCANDESCENT	 75W INCANDESCENT


MIZAR/CEFA (resin)



IP55

FILAMENT LED INCLUDED

6W	4000K U23.151.F1L
2700K	U23.151.F1R
8W	4000K U23.151.M1L
2700K	U23.151.M1R

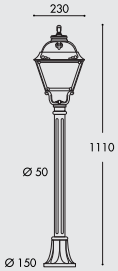

230
1110
Ø 50
Ø 150


RICU BISSE/CEFA 2L



IP55


FILAMENT LED INCLUDED

6W	4000K U23.157.S20.F1L
2700K	U23.157.S20.F1R
8W	4000K U23.157.S20.M1L
2700K	U23.157.S20.M1R

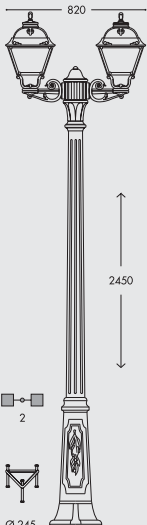

820
2450
Ø 245


RICU BISSE/CEFA 3L



IP55

FILAMENT LED INCLUDED

6W	4000K U23.157.S30.F1L
2700K	U23.157.S30.F1R
8W	4000K U23.157.S30.M1L
2700K	U23.157.S30.M1R

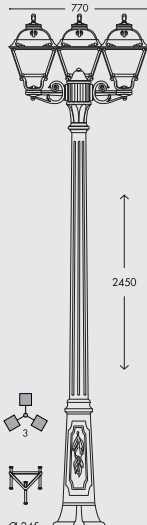

770
2450
Ø 245

"METAL POST COVERED BY RESIN"



STEEL
RESIN
EXPANSE



ANTI RUST
LIFETIME GUARANTEE
NO PAINTING REQUIRED
MADE IN ITALY

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZERS




ALOE'.R/CEFA (resin)

IP55



6W	4000K	U23.163.F1L
	2700K	U23.163.F1R
8W	4000K	U23.163.M1L
	2700K	U23.163.M1R

FILAMENT LED INCLUDED




ARTU'/CEFA

IP55



6W	4000K	U23.158.F1L
	2700K	U23.158.F1R
8W	4000K	U23.158.M1L
	2700K	U23.158.M1R

FILAMENT LED INCLUDED



MEDIUM LANTERN




GIGI/CEFA

IP55



6W	4000K	U23.156.F1L
	2700K	U23.156.F1R
8W	4000K	U23.156.M1L
	2700K	U23.156.M1R

FILAMENT LED INCLUDED

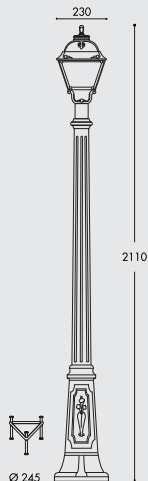


RICU/CEFA

IP55



6W	4000K	U23.157.F1L
	2700K	U23.157.F1R
8W	4000K	U23.157.M1L
	2700K	U23.157.M1R

FILAMENT LED INCLUDED



LARGE LANTERN



HALF LANTERN



GLOBE 300 RANGE

MEDIUM SIZE

fumagalli
since 1973

MADE IN
ITALY

G30.111

E27 FILAMENT LED

**INDOOR &
OUTDOOR
USE**

+80°C
-30°C

90%
HUMIDITY

VOLTAGE SURGE
RESISTANT

6W (800 lm)
8W (1000 lm)
12W (1500 lm)

More details at page 60



G30.162




AVAILABLE COLORS				
RESIN BODY		DIFFUSER		
				
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)



E27 LED FILAMENT VERSION	
	8W 1000 lm 100-240V 50/60 Hz 4000K 2700K  75W INCANDESCENT




BISSO/G300



IP55
◆ ▲ ▲

8W 4000K 2700K	G30.131.M1L G30.131.M1R
E27	G30.131.E27

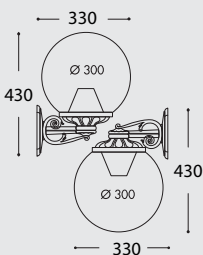


Master box: **24pcs**

MEDIUM LANTERN




MINILOT/G300

8W 4000K 2700K	G30.111.M1L G30.111.M1R
E27	G30.111.E27



IP55
◆ ▲ ▲



Master box: **24pcs**

SICHEM/G300

8W 4000K 2700K	G30.120.M1L G30.120.M1R
E27	G30.120.E27



IP55
◆ ▲ ▲



Master box: **24pcs**

LARGE LANTERN



HALF LANTERN



BOLLARD



AVAILABLE COLORS

RESIN BODY	DIFFUSER
	
	
	

BLACK (A) WHITE (W) CLEAR (X) OPAL (Y) SMOKED (Z)


ENERGY CLASS



energy - энергия

A+ A A- B C D E


A+

E27 LED FILAMENT VERSION



6W	8W
800Lm	1000Lm
100-240V 50/60 Hz	100-240V 50/60 Hz
4000K 2700K	4000K 2700K
 60W INCANDESCENT	 75W INCANDESCENT


IAFET.R/G300 (resin)



IP55


FILAMENT LED INCLUDED

6W	4000K G30.162.F1L 2700K G30.162.F1R
8W	4000K G30.162.M1L 2700K G30.162.M1R

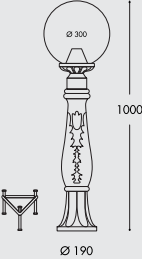

box: 2pcs


RICU BISSO/G300 2L



IP55


FILAMENT LED INCLUDED

6W	4000K G30.157.S20.F1L 2700K G30.157.S20.F1R
8W	4000K G30.157.S20.M1L 2700K G30.157.S20.M1R

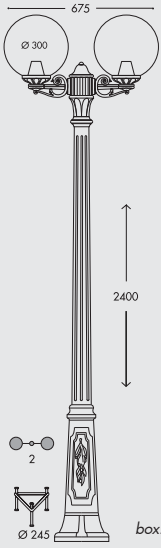

box: 2pcs


RICU BISSO/G300 3L



IP55

FILAMENT LED INCLUDED

6W	4000K G30.157.S30.F1L 2700K G30.157.S30.F1R
8W	4000K G30.157.S30.M1L 2700K G30.157.S30.M1R

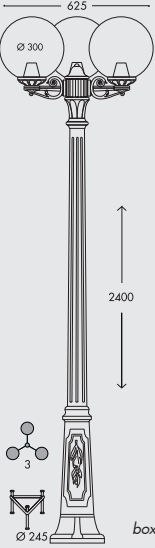

box: 2pcs

"METAL POST COVERED BY RESIN"



STEEL
RESIN
EXPANSE



ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZERS



ALOE'.R/G300 (resin)

IP55

6W	4000K	G30.163.F1L
	2700K	G30.163.F1R
8W	4000K	G30.163.M1L
	2700K	G30.163.M1R

FILAMENT LED INCLUDED

box: 2pcs

ARTU'.G300

IP55

6W	4000K	G30.158.F1L
	2700K	G30.158.F1R
8W	4000K	G30.158.M1L
	2700K	G30.158.M1R

FILAMENT LED INCLUDED

box: 2pcs

GIGI/G300

IP55

6W	4000K	G30.156.F1L
	2700K	G30.156.F1R
8W	4000K	G30.156.M1L
	2700K	G30.156.M1R

FILAMENT LED INCLUDED

box: 2pcs

RICU/G300

IP55

6W	4000K	G30.157.F1L
	2700K	G30.157.F1R
8W	4000K	G30.157.M1L
	2700K	G30.157.M1R

FILAMENT LED INCLUDED

box: 2pcs



NOEMI RANGE

LARGE SIZE

fumagalli®
since 1973

MADE IN
ITALY

E27 HIGH POWER LED

**INDOOR &
OUTDOOR
USE**

+80°C
-30°

90%
HUMIDITY

VOLTAGE SURGE
RESISTANT

15W (1500 lm)
30W (3300 lm)
50W (5000 lm)

More details at page 57




**NEW VERSION
HIGH POWER
LED**



E35.132.Q1R



AVAILABLE COLORS	
RESIN BODY	DIFFUSER
	
BLACK [A]	WHITE [W]
	
CLEAR [X]	OPAL [Y]




E27 HIGH POWER LED VERSION			
15W <small>NEW</small>		30W	
1500 lm		3300 lm	
100-240V 50/60 Hz		100-240V 50/60 Hz	
4000K	3000K	4000K	3000K
= 100W INCANDESCENT		= NOEMI 70W HQI-SON	

OFIR/NOEMI



15W LED 4000K	E35.132.R1L	NEW
3000K	E35.132.R1R	
30W LED 4000K	E35.132.Q1L	
3000K	E35.132.Q1R	

**NEW VERSION
HIGH POWER LED**

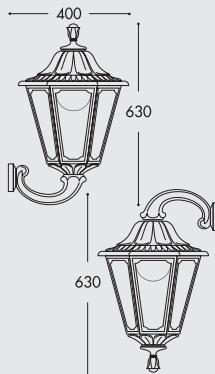


box: **1pcs**

LOT/NOEMI

15W LED 4000K	E35.113.R1L	NEW
3000K	E35.113.R1R	
30W LED 4000K	E35.113.Q1L	
3000K	E35.113.Q1R	



**NEW VERSION
HIGH POWER LED**




box: **1pcs**

SICHEM/NOEMI

15W LED 4000K	E35.121.R1L	NEW
3000K	E35.121.R1R	
30W LED 4000K	E35.121.Q1L	
3000K	E35.121.Q1R	



**NEW VERSION
HIGH POWER LED**



box: **1pcs**



MEDIUM LANTERN



LARGE LANTERN






HALF LANTERN



BOLLARD





E27 HIGH POWER LED VERSION					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	COMPARISON
 E27 HIGH POWER LED Ø 100	NEW 15W	1500lm	100-240V 50/60 Hz	4000K	≈  100W INCANDESCENT
				3000K	
	30W	3300lm	100-240V 50/60 Hz	4000K	≈ NOEMI  70W HQI-SON
				3000K	




IAFET.R/NOEMI (resin)



IP55



15W LED	4000K 3000K	E35.162.R1L E35.162.R1R	NEW
30W LED	4000K 3000K	E35.162.Q1L E35.162.Q1R	



**NEW VERSION
HIGH POWER LED**

box: **2pcs**




IP55




ARTU'/NOEMI		GIGI/NOEMI		RICU/NOEMI	
NEW 15W LED	4000K E35.158.R1L 3000K E35.158.R1R	15W LED	4000K E35.156.R1L 3000K E35.156.R1R	15W LED	4000K E35.157.R1L 3000K E35.157.R1R
30W LED	4000K E35.158.Q1L 3000K E35.158.Q1R	30W LED	4000K E35.156.Q1L 3000K E35.156.Q1R	30W LED	4000K E35.157.Q1L 3000K E35.157.Q1R

**NEW VERSION
HIGH POWER LED**


**NEW VERSION
HIGH POWER LED**

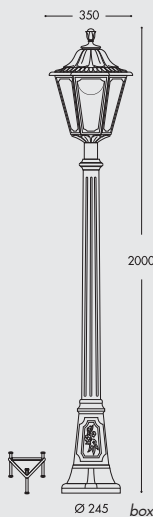

box: **2pcs**

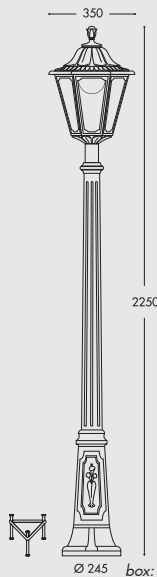

box: **2pcs**

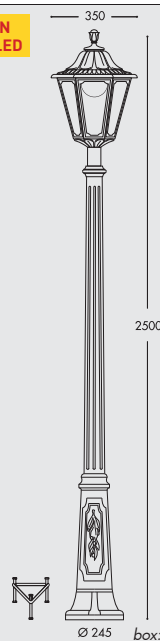

box: **2pcs**

"METAL POST COVERED BY RESIN"



STEEL
RESIN
EXPANSE



ANTI RUST
LIFETIME GUARANTEE
NO PAINTING REQUIRED
MADE IN ITALY

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZERS



NEBO/NOEMI

30W LED 4000K E35.201.Q1L
3000K E35.201.Q1R

**NEW VERSION
HIGH POWER LED**




IP55




NEBO OFIR/NOEMI 2L

30W LED 4000K E35.201.R20.Q1L
3000K E35.201.R20.Q1R

**NEW VERSION
HIGH POWER LED**

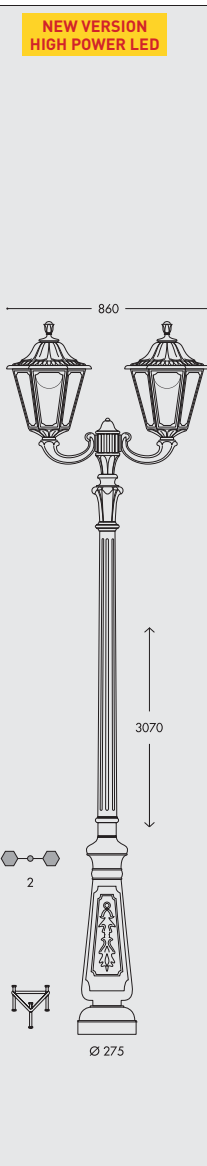

IP55

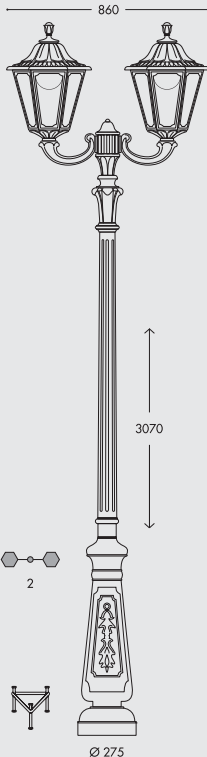

MEDIUM LANTERN



LARGE LANTERN



HALF LANTERN



BOLLARD



SILOE RANGE

LARGE SIZE



MADE IN
ITALY

**NEW VERSION
HIGH POWER
LED**



K35.132.Q1R

E27 HIGH POWER LED

**INDOOR &
OUTDOOR
USE**

+80°C
-30°

90%
HUMIDITY

VOLTAGE SURGE
RESISTANT

**15W (1500 lm)
30W (3300 lm)
50W (5000 lm)**

More details at page 57



AVAILABLE COLORS	
RESIN BODY	DIFFUSER
	
BLACK [A]	WHITE [W]
	
CLEAR [X]	OPAL [Y]



E27 HIGH POWER LED VERSION			
15W NEW		30W	
1500 lm		3300 lm	
100-240V 50/60 Hz		100-240V 50/60 Hz	
4000K	3000K	4000K	3000K
= 100W INCANDESCENT		= NOEMI 70W HQI-SON	





15W LED 4000K 3000K	K35.132.R1L K35.132.R1R	NEW
30W LED 4000K 3000K	K35.132.Q1L K35.132.Q1R	



NEW VERSION HIGH POWER LED

box: **1pcs**





NEW VERSION HIGH POWER LED



box: **1pcs**





NEW VERSION HIGH POWER LED



box: **1pcs**



ENERGY CLASS

класс энергопотребления

A+

A



B

C


D

E


A+

E27 HIGH POWER LED VERSION						
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	COMPARISON	
 E27 HIGH POWER LED Ø 100	NEW 15W	1500Lm	100-240V 50/60 Hz	4000K	≈ 100W INCANDESCENT	
	30W	3300Lm	100-240V 50/60 Hz	4000K	≈ SILOE 70W	
				3000K		

IP55




NEW 15W LED	4000K 3000K	K35.162.R1L K35.162.R1R	NEW
30W LED	4000K 3000K	K35.162.Q1L K35.162.Q1R	

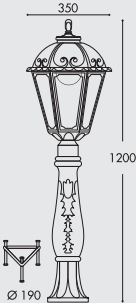


**NEW VERSION
HIGH POWER LED**

box: **2pcs**

IP55




NEW 15W LED	4000K 3000K	K35.158.R1L K35.158.R1R	NEW 15W LED	4000K 3000K	K35.156.R1L K35.156.R1R	15W LED	4000K 3000K	K35.157.R1L K35.157.R1R
30W LED	4000K 3000K	K35.158.Q1L K35.158.Q1R	30W LED	4000K 3000K	K35.156.Q1L K35.156.Q1R	30W LED	4000K 3000K	K35.157.Q1L K35.157.Q1R

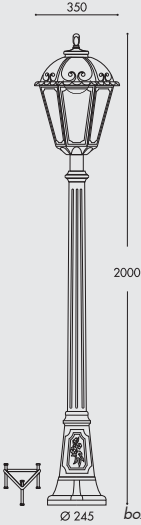


**NEW VERSION
HIGH POWER LED**

box: **2pcs**

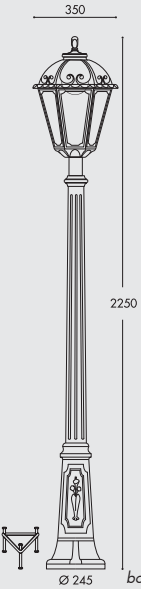

**NEW VERSION
HIGH POWER LED**

box: **2pcs**

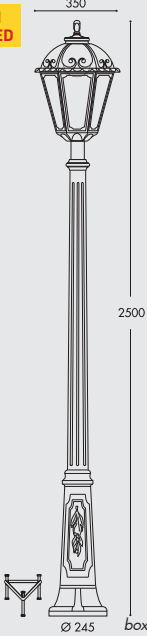

**NEW VERSION
HIGH POWER LED**

box: **2pcs**

"METAL POST COVERED BY RESIN"

STEEL
RESIN
EXPANSE

ANTI RUST
LIFETIME GUARANTEE
NO PAINTING REQUIRED

MADE IN ITALY

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZERS

ANNA
SABA
GLOBE 250
Ø 250

NEBO/SILOE

30W LED	4000K	K35.201.Q1L
	3000K	K35.201.Q1R

NEW VERSION HIGH POWER LED

Ø 275

IP55

NEBO OFIR/SILOE 2L

30W LED	4000K	K35.201.R20.Q1L
	3000K	K35.201.R20.Q1R

NEW VERSION HIGH POWER LED

Ø 275

IP55

MEDIUM LANTERN

RUT
SALEM
GOLIA
CEFA
GLOBE 300
Ø 300

LARGE LANTERN

NOEMI
SILOE
TOBIA
SIMON

HALF LANTERN

IESSE/DARIA

BOLLARD

SAURO/PIRELLA

MADE IN ITALY

43

TOBIA RANGE

LARGE SIZE

fumagalli®
since 1973

MADE IN
ITALY

**NEW VERSION
HIGH POWER
LED**

E27 HIGH POWER LED

**INDOOR &
OUTDOOR
USE**

+80°C
-30°C

90%
HUMIDITY

VOLTAGE SURGE
RESISTANT

15W (1500 lm)
30W (3300 lm)
50W (5000 lm)


More details at page 57



Q33.113.Q1R



AVAILABLE COLORS	
RESIN BODY	DIFFUSER
	
BLACK (A)	CLEAR (X)
	
WHITE (W)	OPAL (Y)




E27 HIGH POWER LED VERSION			
15W NEW		30W	
1500 lm		3300 lm	
100-240V 50/60 Hz		100-240V 50/60 Hz	
4000K	3000K	4000K	3000K
= 100W INCANDESCENT		= TOBIA 70W HQI-SON	

OFIR/TOBIA



15W LED 4000K 3000K	Q33.132.R1L Q33.132.R1R	NEW
30W LED 4000K 3000K	Q33.132.Q1L Q33.132.Q1R	

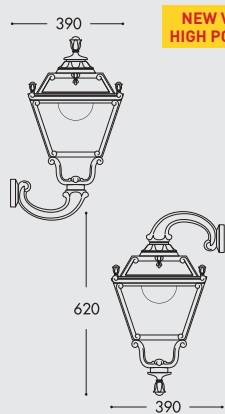

NEW VERSION HIGH POWER LED

box: 1pcs

LOT/TOBIA

15W LED 4000K 3000K	Q33.113.R1L Q33.113.R1R	NEW
30W LED 4000K 3000K	Q33.113.Q1L Q33.113.Q1R	



NEW VERSION HIGH POWER LED



box: 1pcs

SICHEM/TOBIA

15W LED 4000K 3000K	Q33.121.R1L Q33.121.R1R	NEW
30W LED 4000K 3000K	Q33.121.Q1L Q33.121.Q1R	



NEW VERSION HIGH POWER LED



box: 1pcs



MEDIUM LANTERN



LARGE LANTERN






HALF LANTERN



BOLLARD







E27 HIGH POWER LED VERSION					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	COMPARISON
 Ø 100	15W NEW	1500lm	100-240V 50/60 Hz	4000K	≈  100W INCANDESCENT
	30W	3300lm	100-240V 50/60 Hz	4000K	≈ TOBIA  70W HQI-SOI




IAFET.R/TOBIA (resin)



15W LED	4000K 3000K	Q33.162.R1L Q33.162.R1R	NEW
30W LED	4000K 3000K	Q33.162.Q1L Q33.162.Q1R	

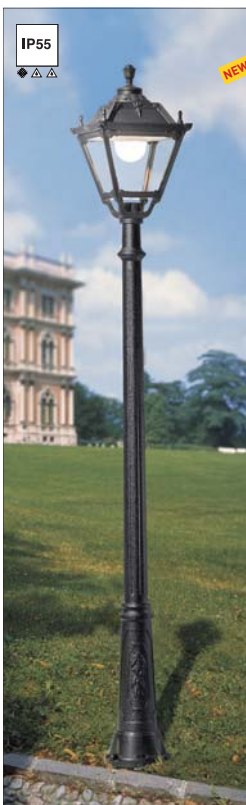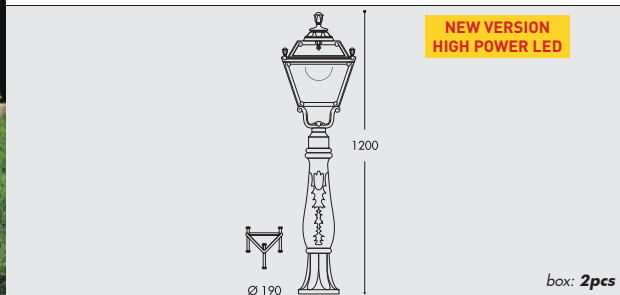

ARTU'/TOBIA	GIGI/TOBIA	RICU/TOBIA
15W LED 4000K Q33.158.R1L 3000K Q33.158.R1R	15W LED 4000K Q33.156.R1L 3000K Q33.156.R1R	15W LED 4000K Q33.157.R1L 3000K Q33.157.R1R
30W LED 4000K Q33.158.Q1L 3000K Q33.158.Q1R	30W LED 4000K Q33.156.Q1L 3000K Q33.156.Q1R	30W LED 4000K Q33.157.Q1L 3000K Q33.157.Q1R

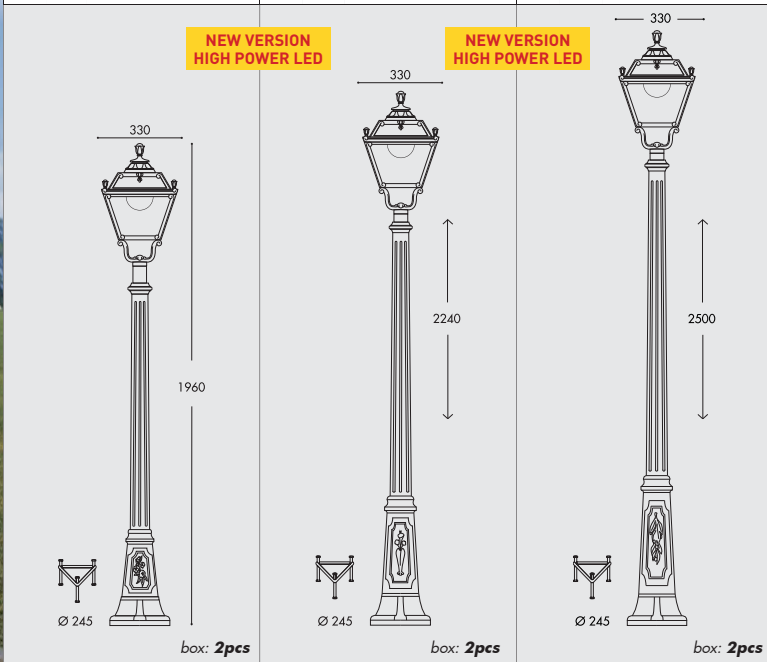

"METAL POST COVERED BY RESIN"

STEEL
RESIN
EXPANSE

ANTI RUST
LIFETIME GUARANTEE
NO PAINTING REQUIRED

MADE IN ITALY

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZERS

ANNA
SABA
GLOBE 250
Ø 250

NEBO/TOBIA			
30W LED	4000K	Q33.201.Q1L	
	3000K	Q33.201.Q1R	

NEW VERSION
HIGH POWER LED

IP55

NEBO OFIR/TOBIA 2L			
30W LED	4000K	Q33.201.R20.Q1L	
	3000K	Q33.201.R20.Q1R	

NEW VERSION
HIGH POWER LED

IP55

MEDIUM LANTERN

RUT
SALEM
GOLIA
CEFA
GLOBE 300
Ø 300

LARGE LANTERN

NOEMI
SILOE
TOBIA
SIMON

HALF LANTERN

IESSE/DARIA

BOLLARD

SAURO/PIRELLA

MADE IN ITALY

47



**NEW VERSION
HIGH POWER
LED**

U33.132.Q1R

E27 HIGH POWER LED

**INDOOR &
OUTDOOR
USE**

**+80°C
-30°C** **90%
HUMIDITY**


**VOLTAGE SURGE
RESISTANT**

15W (1500 lm)
30W (3300 lm)
50W (5000 lm)

More details at page 57



AVAILABLE COLORS	
RESIN BODY	DIFFUSER
	
BLACK (A)	CLEAR (X)
	
WHITE (W)	OPAL (Y)




E27 HIGH POWER LED VERSION			
15W NEW		30W	
1500 lm		3300 lm	
100-240V 50/60 Hz		100-240V 50/60 Hz	
4000K	3000K	4000K	3000K
= 100W INCANDESCENT		= TOBIA 70W HQI-SON	

OFIR/SIMON



15W LED 4000K 3000K	U33.132.R1L U33.132.R1R	NEW
30W LED 4000K 3000K	U33.132.Q1L U33.132.Q1R	

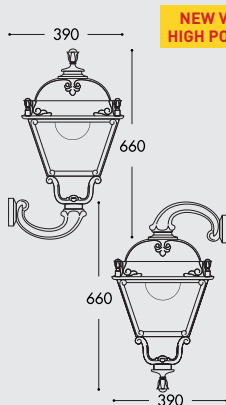

**NEW VERSION
HIGH POWER LED**


box: 1pcs

LOT/SIMON

15W LED 4000K 3000K	U33.113.R1L U33.113.R1R	NEW
30W LED 4000K 3000K	U33.113.Q1L U33.113.Q1R	



**NEW VERSION
HIGH POWER LED**




box: 1pcs

SICHEM/SIMON

15W LED 4000K 3000K	U33.121.R1L U33.121.R1R	NEW
30W LED 4000K 3000K	U33.121.Q1L U33.121.Q1R	






**NEW VERSION
HIGH POWER LED**




box: 1pcs






E27 HIGH POWER LED VERSION					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	COMPARISON
 E27 HIGH POWER LED Ø 100	15W <small>NEW</small>	1500lm	100-240V 50/60 Hz	4000K	≈  100W INCANDESCENT
	30W	3300lm	100-240V 50/60 Hz	4000K	≈  TOBIA HQI-SON 70W





IP55
△ △


15W LED	4000K 3000K	U33.162.R1L U33.162.R1R	NEW
30W LED	4000K 3000K	U33.162.Q1L U33.162.Q1R	

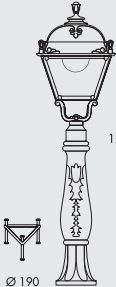

1240
Ø 190

**NEW VERSION
HIGH POWER LED**


box: **2pcs**



IP55
◆ △ △

ARTU'/SIMON	GIGI'/SIMON	RICU'/SIMON
15W LED 4000K 3000K U33.158.R1L U33.158.R1R	15W LED 4000K 3000K U33.156.R1L U33.156.R1R	15W LED 4000K 3000K U33.157.R1L U33.157.R1R
30W LED 4000K 3000K U33.158.Q1L U33.158.Q1R	30W LED 4000K 3000K U33.156.Q1L U33.156.Q1R	30W LED 4000K 3000K U33.157.Q1L U33.157.Q1R


**NEW VERSION
HIGH POWER LED**

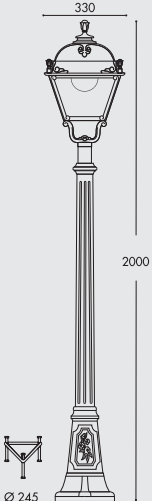

330
2000
Ø 245

box: **2pcs**


**NEW VERSION
HIGH POWER LED**

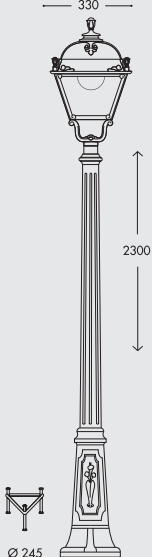

330
2300
Ø 245

box: **2pcs**

**NEW VERSION
HIGH POWER LED**

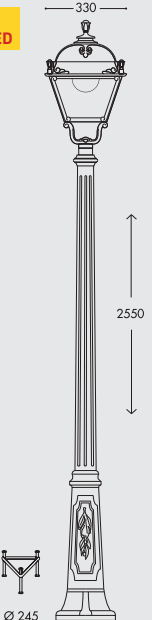

330
2550
Ø 245

box: **2pcs**

"METAL POST COVERED BY RESIN"

STEEL
RESIN
EXPANSE

ANTI RUST
LIFETIME GUARANTEE
NO PAINTING REQUIRED

MADE IN ITALY

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZERS




NEBO/SIMON

30W LED	4000K	U33.201.Q1L
	3000K	U33.201.Q1R



IP55

NEW VERSION
HIGH POWER LED

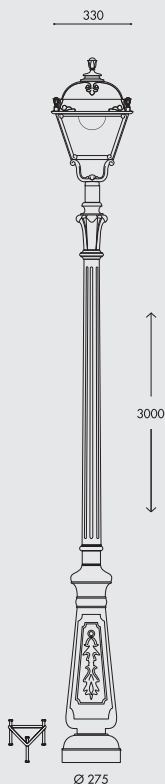


NEBO OFIR/SIMON 2L

30W LED	4000K	U33.201.R20.Q1L
	3000K	U33.201.R20.Q1R



IP55

NEW VERSION
HIGH POWER LED

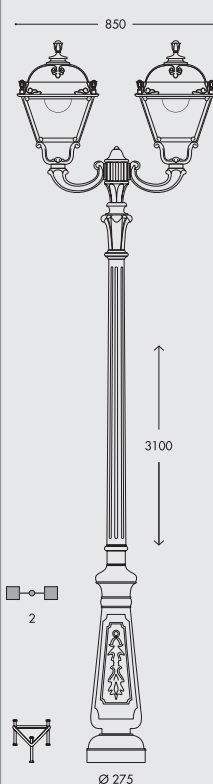

MEDIUM LANTERN



LARGE LANTERN



HALF LANTERN



BOLLARD



HALF LANTERN

MADE IN
ITALY

M22.000.F1R



E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

6W (800 lm)
8W (1000 lm)

More details at page 60



AVAILABLE COLORS	
RESIN BODY	DIFFUSER
	
BLACK (A)	WHITE (W)
	
CLEAR (X)	OPAL (Y)



E27 LED FILAMENT VERSION	
6W	12W
800 lm	1500 lm
100-240V 50/60 Hz	100-240V 50/60 Hz
4000K 2700K	4000K 2700K
60W INCANDESCENT	100W INCANDESCENT



IESSE

6W 4000K 2700K	M22.000.F1L M22.000.F1R
E27	M22.000.E27

Master box: **16pcs**



DARIA

12W 4000K 2700K	M28.000.N1L M28.000.N1R
E27	M28.000.E27

E27 SUITABLE FOR
MBF - HQI - SON



SAURO

CLASSIC BOLLARD



D15.554.D1LCRB

E27 VERSION





LED **SAURO 1100** **E27**

LAMP INCLUDED: **GX53 LED**

7W	4000K	D15.555.C1LCRB
	3000K	D15.555.C1RCRB
10W	4000K	D15.555.D1LCRB
	3000K	D15.555.D1RCRB
E27	D15.555.E27	

1100

150

Ø245

LED E27

with white resin louvre
FRA

with aluminium chrome louvre
FC1

MEDIUM LANTERN



LARGE LANTERN



LED **SAURO 800** **E27**

LAMP INCLUDED: **GX53 LED**

7W	4000K	D15.554.C1LCRB
	3000K	D15.554.C1RCRB
10W	4000K	D15.554.D1LCRB
	3000K	D15.554.D1RCRB
E27	D15.554.E27	

800

150

Ø245

LED E27

with white resin louvre
FRA





with aluminium chrome louvre
FC1

HALF LANTERN



BOLLARD




BOLLARD LED VERSIONS					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
	7W	800Lm	100-240V 50/60 Hz	4000K	 75W INCANDESCENT
				3000K	
	10W	1200Lm	100-240V 50/60 Hz	4000K	 100W INCANDESCENT
				3000K	





LED



SAURO 500


E27

LAMP INCLUDED:
GX53 LED 

7W	4000K	D15.553.C1LCRB
3000K		D15.553.C1RCRB
10W	4000K	D15.553.D1LCRB
3000K		D15.553.D1RCRB
E27		D15.553.E27








LED **E27**



LED



MIRELLA


E27

LAMP INCLUDED:
GX53 LED 

7W	4000K	D15.505.C1LCRB
3000K		D15.505.C1RCRB
10W	4000K	D15.505.D1LCRB
3000K		D15.505.D1RCRB
E27		D15.505.E27







LED **E27**

E27 HIGH POWER LED

 <p>NEW</p>	 <p>Ø100</p> <p>165</p> <p>E27</p>	<p>CE LVD tested EMC tested ERP 6000h</p> <p>TUV SUD</p>	POWER	15 W NEW		30 W	
			LUMINOUS FLUX	1500 lm		3300 lm	
			EFFICIENCY	100 Lm/W		110 Lm/W	
			VOLTAGE	100-240 V		100-240 V	
			FREQUENCY	50/60 Hz		50/60 Hz	
			CURRENT	130 mA		135 mA	
			POWER FACTOR	> 0,5		> 0,9	
			COLOR RENDERING INDEX RA	> 80		> 80	
			BEAM ANGLE	200°		200°	
			WARM UP TIME	< 0,5"		< 1"	
<p>SILICONE PROTECTION</p> <p>DRIVER</p> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p>	 <p>Ø100</p> <p>165</p> <p>E27</p>	<p>CE LVD tested EMC tested ERP 6000h</p> <p>TUV SUD</p>	KELVIN	4000 K	3000 K	4000 K	3000 K
			REF. CODE	H3.LED.HIP.4K	H3.LED.HIP.3K	H2.LED.HIP.4K	H2.LED.HIP.3K
			COMPARISON	<p>15W 1500 Lm</p> <p>=</p> <p>100W incandescent</p> <p>SAVE 85%</p>		<p>30W 3300 Lm</p> <p>=</p> <p>50W HQI-SON</p> <p>SAVE 40%</p>	

E27 HIGH POWER LED

 <p>NEW</p>	 <p>Ø118</p> <p>185</p> <p>E27</p>	<p>CE LVD tested EMC tested ERP 6000h</p> <p>TUV SUD</p>	POWER	50 W	
			LUMINOUS FLUX	5000 lm	
			EFFICIENCY	100 Lm/W	
			VOLTAGE	100-240 V	
			FREQUENCY	50/60 Hz	
			CURRENT	210 mA	
			POWER FACTOR	> 0,9	
			COLOR RENDERING INDEX RA	> 80	
			BEAM ANGLE	200°	
			WARM UP TIME	< 1"	
<p>SILICONE PROTECTION</p> <p>DRIVER</p> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p>	 <p>Ø118</p> <p>185</p> <p>E27</p>	<p>CE LVD tested EMC tested ERP 6000h</p> <p>TUV SUD</p>	KELVIN	4000 K	3000 K
			REF. CODE	H.LED.HIP.4K H.LED.HIP.3K	
			COMPARISON	<div><div>50W 5000 Lm</div><div>=</div><div>70W HQL-SON</div><div>SAVE 30%</div></div>	


GU10 LED				
<div></div> <div><div>CE</div><div>LVD tested</div><div>EMC tested</div><div>TUV SUD</div><div>ERP 6000h</div></div>	POWER	3,5 W		
	LUMINOUS FLUX	400 lm		
	EFFICIENCY	114 lm/W		
	VOLTAGE	100-240 V		
	FREQUENCY	50/60 Hz		
	CURRENT	70 mA		
	COLOR RENDERING INDEX RA	> 80		
	BEAM ANGLE	36°		
	WARM UP TIME	≤ 0,5"		
	SWITCHING CYCLE	> 25.000		
	LIFETIME	25.000 h		
<div><div>SILICONE PROTECTION DRIVER</div><div></div><div><div>INDOOR & OUTDOOR USE</div><div>-30 +80 °C90% HUMIDITY</div><div>VOLTAGE SURGE RESISTANT</div></div></div> <div><div><div>— Ø50 —</div><div></div><div></div><div>54</div><div>GU10</div></div></div>	KELVIN	4000 K	3000 K	
	REF. CODE	H.LED.GU10		H.LED.GU10.3K
	COMPARISON	<div><div><div>3,5W 400 Lm</div><div></div></div><div>=</div><div><div>50W halogen</div><div></div></div><div>SAVE 92%</div></div>		



GX53 LED Ø75																																				
<div><div><div>CE</div><div>LVD tested</div><div>EMC tested</div><div>TUV SUD</div><div>ERP 6000h</div></div></div>	<table><tr><td>POWER</td><td colspan="2">3 W</td></tr><tr><td>LUMINOUS FLUX</td><td colspan="2">350 lm</td></tr><tr><td>EFFICIENCY</td><td colspan="2">116 Lm/W</td></tr><tr><td>VOLTAGE</td><td colspan="2">100-240 V</td></tr><tr><td>FREQUENCY</td><td colspan="2">50/60 Hz</td></tr><tr><td>CURRENT</td><td colspan="2">30 mA</td></tr><tr><td>COLOR RENDERING INDEX RA</td><td colspan="2">> 80</td></tr><tr><td>BEAM ANGLE</td><td colspan="2">120°</td></tr><tr><td>WARM UP TIME</td><td colspan="2">≤ 0,5"</td></tr><tr><td>SWITCHING CYCLE</td><td colspan="2">> 30.000</td></tr><tr><td>LIFETIME</td><td colspan="2">25.000 h</td></tr></table>			POWER	3 W		LUMINOUS FLUX	350 lm		EFFICIENCY	116 Lm/W		VOLTAGE	100-240 V		FREQUENCY	50/60 Hz		CURRENT	30 mA		COLOR RENDERING INDEX RA	> 80		BEAM ANGLE	120°		WARM UP TIME	≤ 0,5"		SWITCHING CYCLE	> 30.000		LIFETIME	25.000 h	
	POWER	3 W																																		
	LUMINOUS FLUX	350 lm																																		
	EFFICIENCY	116 Lm/W																																		
	VOLTAGE	100-240 V																																		
	FREQUENCY	50/60 Hz																																		
	CURRENT	30 mA																																		
	COLOR RENDERING INDEX RA	> 80																																		
	BEAM ANGLE	120°																																		
	WARM UP TIME	≤ 0,5"																																		
	SWITCHING CYCLE	> 30.000																																		
LIFETIME	25.000 h																																			
<table><tr><td>KELVIN</td><td>4000 K</td><td>3000 K</td></tr></table>			KELVIN	4000 K	3000 K																															
KELVIN	4000 K	3000 K																																		
<table><tr><td>REF. CODE</td><td>H.LED.G53</td><td>H.LED.G53.3K</td></tr></table>			REF. CODE	H.LED.G53	H.LED.G53.3K																															
REF. CODE	H.LED.G53	H.LED.G53.3K																																		
<div><div><div>INDOOR & OUTDOOR USE</div><div><div>-30 +80 °C</div><div>90% HUMIDITY</div></div><div>VOLTAGE SURGE RESISTANT</div></div><div></div></div>	<div><div><div>Ø75</div><div></div><div></div><div>20</div><div>GX53</div></div></div>	<div><div><div>3W 350 Lm</div><div></div></div><div>=</div><div><div>40W incandescent</div><div></div></div><div>SAVE 93%</div></div>																																		

GX53 LED Ø100mm

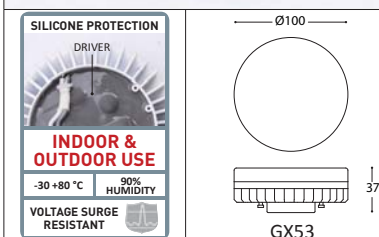

POWER	7 W	10 W
LUMINOUS FLUX	800 lm	1200 lm
EFFICIENCY	114 Lm/W	120 Lm/W
VOLTAGE	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz
CURRENT	34 mA	48 mA
POWER FACTOR	0,9	0,9
COLOR RENDERING INDEX RA	> 80	> 80
BEAM ANGLE	120°	120°
WARM UP TIME	≤ 0,5"	≤ 0,5"
SWITCHING CYCLE	> 30.000	> 30.000
LIFETIME	25.000 h	25.000 h







KELVIN	4000 K	3000 K	4000 K	3000 K
REF. CODE	H2.LED.G53	H2.LED.G53.3K	H3.LED.G53	H3.LED.G53.3K
COMPARISON	7W 800 Lm = 75W incandescent  SAVE 90%		10W 1200 Lm = 100W incandescent  SAVE 90%	

GX53 LED Ø180mm



POWER	7 W NEW	11 W	18 W
LUMINOUS FLUX	600 lm	1300 lm	2000 lm
EFFICIENCY	86 Lm/W	118 Lm/W	111 Lm/W
VOLTAGE	100-240 V	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz
CURRENT	60 mA	150 mA	200 mA
POWER FACTOR	0,5	0,9	0,9
CRI (RA)	> 80	> 80	> 80
BEAM ANGLE	90°	90°	90°
WARM UP TIME	≤ 0,5"	≤ 0,5"	≤ 0,5"
SWITCHING CYCLE	30.000	> 25.000	> 25.000
LIFETIME	25.000 h	25.000 h	25.000 h

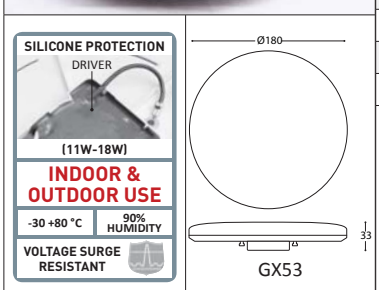

KELVIN	4000 K	3000 K	4000 K	3000 K	4000 K	3000 K
REF. CODE	H6.LED.G53.4K	H6.LED.G53.3K	H4.LED.G53	H4.LED.G53.3K	H5.LED.G53.4K	H5.LED.G53.3K
COMPARISON	7W 600 Lm = 60W incandescent  SAVE 88%		11W 1300 Lm = 100W incandescent  SAVE 89%		18W 2000 Lm = 150W incandescent  SAVE 88%	

Available from June 2018

NEW 4000K





CE

LVD tested

TUV SUD

EMC tested

ERP

6000h

POWER	6 W	8 W
LUMINOUS FLUX	800 lm	1000 lm
EFFICIENCY	133 Lm/W	125 Lm/W
VOLTAGE	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz
CURRENT	60 mA	76 mA
POWER FACTOR	> 0,7	> 0,7
COLOR RENDERING INDEX RA	> 80	> 80
BEAM ANGLE	360°	360°
WARM UP TIME	≤ 0,5"	≤ 0,5"
SWITCHING CYCLE	> 100.000	> 100.000
LIFETIME	25.000 h	25.000 h

SILICONE PROTECTION DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

Ø60



110

E27

KELVIN	4000K	2700 K	4000K	2700 K
REF. CODE	H.LED.FIL.4K	H.LED.FIL.3K	H2.LED.FIL.4K	H2.LED.FIL.3K
COMPARISON	<div><div>6W 800 Lm</div><div>=</div><div>60W incandescent</div><div>SAVE 90%</div></div>		<div><div>8W 1000 Lm</div><div>=</div><div>75W incandescent</div><div>SAVE 89%</div></div>	

NEW 4000K





CE

LVD tested

TUV SUD

EMC tested

ERP

6000h

POWER	12 W
LUMINOUS FLUX	1500 lm
EFFICIENCY	125 Lm/W
VOLTAGE	100-240 V
FREQUENCY	50/60 Hz
CURRENT	100 mA
POWER FACTOR	> 0,7
COLOR RENDERING INDEX RA	> 80
BEAM ANGLE	360°
WARM UP TIME	≤ 0,5"
SWITCHING CYCLE	> 100.000
LIFETIME	25.000 h

SILICONE PROTECTION DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

Ø70



130

E27

KELVIN	4000K	2700K
REF. CODE	H3.LED.FIL.4K	H3.LED.FIL.3K
COMPARISON	<div><div>12W 1500 Lm</div><div>=</div><div>100W incandescent</div><div>SAVE 88%</div></div>	

60

R7s LED 78mm

<div><div>SILICONE PROTECTION</div><div><div>DRIVER</div></div><div>INDOOR & OUTDOOR USE</div><div><div>-30 +80 °C</div><div>90% HUMIDITY</div></div><div>VOLTAGE SURGE RESISTANT</div><div></div></div>	<div><div>NEW</div><div></div><div><div>CE</div><div>LVD tested</div><div>EMC tested</div><div>ERP 6000h</div><div></div></div></div>	POWER	<div>NEW</div> 4 W	
		LUMINOUS FLUX	400 lm	
		EFFICIENCY	100 Lm/W	
		VOLTAGE	100-240 V	
		FREQUENCY	50/60 Hz	
		CURRENT	75 mA	
		POWER FACTOR	> 0,5	
		CRI (RA)	> 80	
		BEAM ANGLE	360°	
		WARM UP TIME	≤ 0,5"	
		SWITCHING CYCLE	45.000	
		LIFETIME	25.000 h	
		KELVIN	4000 K	3000 K
		REF. CODE	H7.LED.R7S.4K	H7.LED.R7S.3K

Ø22



78

R7s

R7s LED 118mm

<div><div>SILICONE PROTECTION</div><div><div>DRIVER</div></div><div>INDOOR & OUTDOOR USE</div><div><div>-30 +80 °C</div><div>90% HUMIDITY</div></div><div>VOLTAGE SURGE RESISTANT</div></div>	<div><div>NEW</div><div></div><div><div>CE</div><div>LVD tested</div><div>EMC tested</div><div>ERP 6000h</div><div>TUV SUD</div></div></div>	POWER	<div>NEW</div> 8,5 W	
		LUMINOUS FLUX	900 lm	
		EFFICIENCY	106 Lm/W	
		VOLTAGE	100-240 V	
		FREQUENCY	50/60 Hz	
		CURRENT	168 mA	
		POWER FACTOR	> 0,5	
		CRI (RA)	> 80	
		BEAM ANGLE	360°	
		WARM UP TIME	≤ 0,5"	
		SWITCHING CYCLE	45.000	
		LIFETIME	25.000 h	
		KELVIN	4000 K	3000 K
		REF. CODE	H8.LED.R7S.4K	H8.LED.R7S.3K

Ø22



118

R7s

R7s LED 189mm

<div><div>SILICONE PROTECTION</div><div><div>DRIVER</div></div><div>INDOOR & OUTDOOR USE</div><div><div>-30 +80 °C</div><div>90% HUMIDITY</div></div><div>VOLTAGE SURGE RESISTANT</div><div></div></div>	<div><div>NEW</div><div></div><div><div>CE</div><div>LVD tested</div><div>EMC tested</div><div>ERP 6000h</div><div></div></div></div>	POWER	<div>NEW</div> 11 W	
		LUMINOUS FLUX	1200 lm	
		EFFICIENCY	110 Lm/W	
		VOLTAGE	100-240 V	
		FREQUENCY	50/60 Hz	
		CURRENT	170 mA	
		POWER FACTOR	> 0,5	
		CRI (RA)	> 80	
		BEAM ANGLE	360°	
		WARM UP TIME	≤ 0,5"	
		SWITCHING CYCLE	45.000	
		LIFETIME	25.000 h	
		KELVIN	4000 K	3000 K
		REF. CODE	H9.LED.R7S.4K	H9.LED.R7S.3K

LOOKING FOR A MODERN DESIGN PRODUCT?

See our **Top selection 2018** dedicated to
our **modern range!**



TO SEE OUR COMPLETE COLLECTION

Ask for our **General Catalogue 2019**
or visit our website at
www.fumagalli.it



137
DISTRIBUTORS
ALL OVER THE WORLD

MADE IN ITALY

RESIN MATERIAL ADVANTAGES



NO MAINTENANCE



ANTI-CORROSION



DOUBLE INSULATION



NOT AFFECTED BY CHEMICAL FERTILIZERS



UV-RAY STABILIZED



RECYCLABLE



UV TREATED



DOUBLE
INSULATION



ANTI-SHOCK



TEMPERATURE



ENERGY SAVING



RESIDENTIAL



PUBLIC

HOW TO READ THE CODE

DIFFUSER
IDENTIFIES
THE DIFFUSER

E22

STRUCTURE
IDENTIFIES THE
STRUCTURE ON
WHICH THE DIFFUSER
IS MOUNTED (POLE,
BRACKET, BASE, SPIKE)

156

SYSTEM
IDENTIFIES THE
MULTIUGHT*
SYSTEM IF PRESENT

S20

**COLOUR OF THE
STRUCTURE**
IDENTIFIES THE COLOUR
OF THE STRUCTURE

A BLACK
W WHITE
L GREY
V ANTIQUE GREEN*
B ANTIQUE BRONZE*

A

**COLOUR OF THE
DIFFUSER**
IDENTIFIES THE COLOUR
OF THE DIFFUSER

X CLEAR
Y OPAL
Z SMOKED

X

ELECTRIFICATION
IDENTIFIES THE TYPE OF
ELECTRIFICATION AND
THE EVENTUAL
PRESENCE OF BULBS

F1R

MADE IN
ITALY



Fumagalli S.r.l.

Via Ca' Bassa, 29

21100 Varese - ITALY

Tel. +39.0332.336353

Fax. +39.0332.336358

Email italian.lux@fumagalli.it



www.fumagalli.it

